


04/14/99



JCE39 U.S. PRO

Patent
Attorney's Docket No. 032567-099

JCE39 U.S. PRO

09/29/06



04/14/99

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY PATENT
APPLICATION TRANSMITTAL LETTER

Box PATENT APPLICATION

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Enclosed for filing is the utility patent application of Masahito NIIKAWA for
PHOTOGRAPHING APPARATUS AND NETWORK SYSTEM.

Also enclosed are:

☒ 14 sheets of drawings;

☒ a claim for foreign priority under 35 U.S.C. §§ 119 and/or 365 is ☐ hereby made to _
filed in _ on _;
☒ in the declaration;

☐ a certified copy of the priority document;

☐ a Constructive Petition for Extensions of Time;

☐ _____ statement(s) claiming small entity status;

☒ an Assignment document;

☐ an Information Disclosure Statement; and

☐ Other: _____

The declaration of the inventor(s) ☒ also is enclosed ☐ will follow.

☐ Please amend the specification by inserting before the first line the sentence --This application claims priority under 35 U.S.C. §§119 and/or 365 to _ filed in _ on _; the entire content of which is hereby incorporated by reference.--

The filing fee has been calculated as follows [] and in accordance with the enclosed preliminary amendment:

C L A I M S					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEE
Basic Application Fee					\$760.00
Total Claims	10	MINUS 20 =	0	x \$18.00	0
Independent Claims	4	MINUS 3 =	1	x \$78.00	\$78.00
If multiple dependent claims are presented, add \$260.00					0
Total Application Fee					\$838.00
If verified Statement claiming small entity status is enclosed, subtract 50% of Total Application Fee					0
Add Assignment Recording Fee of \$40.00 if Assignment document is enclosed					\$40.00
TOTAL APPLICATION FEE DUE					\$878.00

[X] A check in the amount of \$ 878.00 is enclosed for the fee due.

[] Charge \$ _____ to Deposit Account No. 02-4800 for the fee due.

Please address all correspondence concerning the present application to:

Platon N. Mandros
Burns, Doane, Swecker & Mathis, L.L.P.
P.O. Box 1404
Alexandria, Virginia 22313-1404.

The Commissioner is hereby authorized to charge any appropriate fees under 37 C.F.R. §§ 1.16, 1.17 and 1.21 that may be required by this paper, and to credit any overpayment, to Deposit Account No. 02-4800. This paper is submitted in triplicate.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Date: April 14, 1999

By: 

Platon N. Mandros
Registration No. 22,124

P.O. Box 1404
Alexandria, Virginia 22313-1404
(703) 836-6620

PHOTOGRAPHING APPARATUS AND NETWORK SYSTEM

The present invention claims priority based on Japanese Patent Application Serial No. H10-108159, the contents of which are incorporated hereinto by reference in its entirety.

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to a photographing apparatus which can be connected to a network system, in which a plurality of computers (e.g., personal computers which may be abbreviated as PCs) are connected to the network, and to such a network system.

2. Description of the Related Art

A network system, in which a plurality of computers are connected to the network, allows the software sources included in that network to be shared by the connected computers, and information to be exchanged as sources by e-mail. The hardware sources, including data storage media, such as the hard discs of other PCs connected to this network, and the peripheral apparatuses, such as printers and modems, can also be shared by one another. Since the performance of each computer can be enhanced via the network, in addition that the computer itself is becoming more user-friendly, the network system is rapidly

spreading.

On the other hand, digital cameras have also been becoming popular because they do not require development of the films. A digital camera photoelectrically converts the optical image of an object into digital image data by charge coupled devices (CCD). The digital image data is recorded in a recording medium, such as a memory card. The recorded image is reproduced by predetermined manipulations, and is displayed on the display panel of the digital camera. The recorded image can also be deleted, or copied into PCs. Such Digital cameras are being widely used as peripheral apparatuses of PCs, and the functions of each type of digital camera are rapidly progressing.

If a digital camera is incorporated in the above-described network system, the digital camera will be able to use the sources of the network system, and the dimensions of the network media will be enlarged.

Although the recorded images of the conventional digital camera can be copied into a computer (PC) by manipulations on the PC side, the main purposes reside in merely storing and reproducing the recorded images in the PC. In other words, the conventional digital camera is no more than one of the external apparatuses of the PC, and little technological consideration has been made to active use of the network sources.

In order to incorporate the conventional digital camera into a network system, special performances and functions must be added. In this case, the power consumption, as well as the size of the digital camera, inevitably increases. In the present

circumstances, it is difficult to incorporate a digital camera into a network system to allow mutual interaction with other apparatuses in the network without extra cost and functions.

SUMMARY OF THE INVENTION

Therefore, it is an object of the present invention to overcome these problems in the prior art, and to provide a photographing apparatus which can easily and rapidly use the network sources by manipulations on the digital camera side, without adding special functions and performances to the digital camera.

It is another object of the present invention to provide a network system, to which the above photographing apparatus is connected.

In order to achieve these objects, in one aspect of the present invention, a photographing apparatus connectable to a network to which a plurality of image processing apparatuses are connected via cables or by wireless is provided. This photographing apparatus comprises an interface for connecting the photographing apparatus to the network, a display for displaying a network structure, and an operation unit for allowing image data taken by the photographing apparatus to be processed on the network.

With this photographing apparatus, the user can see the network structure on the display, and can treat the photographed image data as a source on the network by manipulating the operation unit, while monitoring the display. This photographing

apparatus can function as a part of the network system without requiring extra high-performance functions, and allows the user to use the network sources at any time.

Since no additional high-performance functions are required,
5 the photographing apparatus can be kept compact without increasing the power consumption.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects, features, and advantages of the present invention will be apparent from the following detailed description of the preferred embodiments with reference to the attached drawings, wherein:

Fig. 1 is a front view of the digital camera used in the network system according to an embodiment of the present invention;

Fig. 2 is a rear view of the digital camera shown in Fig. 1;

Fig. 3 is a bottom view of the digital camera shown in Fig. 1;

Fig. 4 is a block diagram of the control system of the digital camera shown in Figs. 1 through 3;

Fig. 5 illustrates an entire arrangement of the network system according to the embodiment of the present invention;

Fig. 6 illustrates transition of the display windows in the network system shown in Fig. 5;

Fig. 7(a) illustrates the monitor screen of the personal computer when the digital camera is connected to the personal

computer, and Fig. 7(b) illustrates the corresponding display screen of the digital camera;

Fig. 8(a) illustrates the monitor screen of the personal computer when the function key F2 of the digital camera is manipulated on the camera side, and Fig. 8(b) illustrates the corresponding display screen of the digital camera;

Fig. 9(a) illustrates the monitor screen of the personal computer when the function key F1 of the digital camera is manipulated on the camera side, and Fig. 9(b) illustrates the corresponding display screen of the digital camera;

Figs. 10(a) - 10(c) illustrate the display screen of the digital camera when the function F3 is manipulated in the folder designation window, wherein Fig. 10(a) shows the window of the display area, Fig. 10(b) shows the 50% view on the digital camera, and Fig. 10(c) shows the 100% view on the digital camera;

Figs. 11(a) - 11(b) illustrate the warning window opened in the monitor screen of the personal computer when the digital camera is connected to the personal computer, and Fig. 11(b) illustrates the corresponding display screen of the digital camera;

Fig. 12 is a flowchart of the synchronized control for the personal computer and the digital camera;

Fig. 13 illustrates the display screen of the digital camera, through which a desired action can be registered;

Fig. 14 illustrates the display screen of the digital camera for printing out the image data taken by the digital camera; and

Fig. 15 illustrates the display screen of the digital camera

for executing the application software of the personal computer on the digital camera.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

5 Figs. 1-3 illustrate a digital camera used in a network system according to one example of the present invention.

10 The digital camera 1 comprises a camera frame, which is referred to as a main body 2, and a photographing unit 3 which is attachable to and removable from the main body 2 on the right side of the main body 2 in the front view shown in Fig. 1. The photographing unit 3 is pivotable within a plane parallel to the right side of the main body 2.

15 The photographing unit 3 has an image pick-up device comprising a zoom lens 301 and a photoelectric conversion device such as a CCD (Charge Coupled Device) array, to convert the optical image of an object into an electric image consisting of charge signals, each of which was generated by each pixel of the CCD via photoelectric conversion. The main body 2 has a display or LCD (Liquid Crystal Display) 10, a slot 17 for receiving a memory card 8, and a connection terminal 13 for connecting the digital camera to the outside apparatus. The image signal taken by the photographing unit 3 is subjected to a prescribed image processing in the main body 2. The processed image is displayed on the LCD display 10, recorded into the memory card 8, or 25 transferred to the PC.

A zoom lens 301 is provided in the photographing unit 3. An image pick-up circuit including a CCD color area sensor 303

is located at an appropriated position behind the zoom lens 301. A light adjusting circuit 304 having a photo sensor 305 for receiving flash light reflected from the object is provided at an appropriated position in the photographing unit 3.

As shown in Fig. 1, a grip 4 is formed in the left-hand side of the front face of the camera main body 2, and a built-in flash device 5 is provided in the right-hand upper side at an appropriate position. Frame forward and backward switches 6 and 7 are provided near the center of the top face of the main body 2 as shown in Fig. 2. The forward switch 6 feeds the frame in the direction that the frame number increases in the photographed order, and is referred to as an UP key 6. The backward switch 7 feeds the frame in the direction that the frame number decreases, and is referred to as a DOWN key 7. A delete key D for deleting the images recorded in the memory card 8 is provided on the left of the DOWN key 7, and a shutter button 9 is provided on the right of the UP key 6 in the rear view shown in Fig. 2.

As shown in Fig. 2, an LCD 10 is provided in the middle of the left-hand side of the rear face of the camera main body 2. The LCD 10 functions as a view finder during photographing, and as a display during the reproduction of the recorded image. A compression rate setting slide switch 12 for switching the compression rate K of the image data to be recorded in the memory card 8 is positioned below the LCD 10. A USB (Universal Serial Bus) connection terminal 13 is positioned on the side face of the main body 2 near the photographing unit 3. A power switch PS is provided on the top of the rear face of the main body 2.

Further, a trackball TR used as a cursor direction means for the LCD 10 is provided at the right-upper side of the LCD 10. Provided at upper side of the LCD are function keys F1, F2 and F3 for executing a set specific function. Each function key enables to select and register the action when the key is pressed, and the registered content is stored in a nonvolatile memory (not shown) in the general controller 211.

The flash device (which may be abbreviated as FL) of the digital camera 1 has an "automatic flash mode", a "forcible flash mode", and a "flash prohibition mode". In the "automatic flash mode", the built-in flash device 5 automatically emits flash light according to the luminance of the object. In the "forcible flash mode", the built-in flash device 5 forcibly emits flash light regardless of the luminance of the object. In the "flash prohibition mode", light emission of the built-in flash device 5 is prohibited. Every time the user presses the FL mode setting key 11 positioned above the LCD 10 on the rear face of the main body 2, the flash mode is switched among three modes in a cyclic order. The digital camera 1 has a 1/8 compression rate and a 1/20 compression rate, and the user can select the preferred compression rate K. For example, if the compression rate setting switch 12 is shifted to the right, the compression rate K is set to 1/8, and if it is shifted to the left, the compression rate K is set to 1/20. Although, in this embodiment, the compression rate K is set to two values, it may be set to three or more values.

A photographing/reproduction mode setting switch 14 is

positioned at the top right of the rear face of the main body 2. Digital pictures are taken in the photographing mode. In the reproduction mode, the digital images recorded in the memory card 8 are reproduced and displayed on the LCD 10. The photographing/reproduction mode setting switch 14 is also a bicontact slide switch. For example, if the switch is shifted to the right, the reproduction mode is selected, and if shifted to the left, the photographing mode is selected.

The FL mode setting switch 11, the UP key 6, the DOWN key 7 and the shutter button 9 comprise a push key, respectively.

A card insertion slit 17 for receiving the memory card 8 and a battery cavity 18 are positioned on the bottom face of the main body 2. The slit 17 and the battery cavity 18 are covered with a clam-shell type cover 15. The digital camera 1 is loaded with a power supply source E consisting of four AA batteries connected in series.

Fig. 4 is a block diagram of the control system of the digital camera 1.

The CCD 303 in the photographing unit 3 photoelectrically converts the optical image of the object focused by the zoom lens 301 into image signals of three color components R (red), G (green) and B (blue), and outputs the image signals to the signal processor 313. This image signal consists of sequence of pixel signals received by the respective pixels. A timing generator 314 generates various timing pulses for controlling and driving the CCD 303.

Since the diaphragm of the photographing unit 3 is fixed,

the exposure of the photographing unit 3 is controlled by adjusting the quantity of exposure of the CCD 303, that is, the charge accumulation time of the CCD 303, which correspond to the shutter speed. If the luminance of the object is too low to select to an appropriate shutter speed, the level of the image signal output from the CCD 303 is adjusted in order to compensate for the insufficient exposure. In other words, at a low luminance, the exposure is controlled by adjusting both the shutter speed and the gain. The level of the image signal is adjusted by controlling the gain of the AGC circuit in the signal processor 313.

The timing generator 314 generates various driving control signals for the CCD 303 based on the reference clock supplied from the timing control circuit 202. The signals generated by the timing generator 314 includes a timing signal for starting and finishing integration (i.e., exposure), and clock signals (horizontal synchronization signals, vertical synchronization signals, transfer signals, etc.) for controlling the reading timing of the light-receiving signals from the respective pixels. These timing signals are supplied to the CCD 303.

The signal processor 313 applies prescribed analogue signal processing to the analog image signal output from the CCD 303. The signal processor 313 has a CDS (correlation double sampling) circuit for reducing the noise of the image signal and an AGC (automatic gain control) circuit for adjusting the level of the image signal by controlling the gain of this AGC circuit.

The light-quantity adjusting circuit 304 controls the light

data of each color component of R, G or B, so that the white balance can be adjusted after γ (gamma) correction. The WB circuit 207 converts the level of the pixel data of each color component R, G, B using a level conversion table input from the general controller 211. The conversion coefficient (or the slope of the characteristic line) for each color component in the level conversion table is set each photographed image by the general controller 211.

The γ correction circuit 208 corrects for the γ characteristic of the pixel data. The γ correction circuit 208 has, for example, six γ correction tables with different γ characteristics, and uses the most appropriate γ correction table according to the photographed scene or the photographic conditions.

An image memory 209 stores the pixel data output from the γ correction circuit 208. The memory capacity of the image memory 209 corresponds to one frame data. Accordingly, if the CCD 303 has an $n \times m$ pixel matrix, the image memory 209 has a memory capacity of $n \times m$ pixel data, and each pixel data is stored in the corresponding pixel position in the memory.

A VRAM 210 is a buffer memory for storing the image data which is to be reproduced and displayed on the LCD 10. The VRAM 210 has a memory capacity corresponding to the number of pixels to be photographed by the CCD 10.

In the photographing preparation mode, each pixel data of the image taken by the photographing unit 3 every 1/30 seconds is subjected to the prescribed signal processing by the sequence

from the A/D converter 205 to the γ correction circuit 208, and stored in the image memory 209. This pixel data is simultaneously transferred to the VRAM 210 via the general controller 211, and displayed on the LCD 10. The user can see the photographed object (live-view image) on the LCD 10. In the reproduction mode, the image read out from the memory card 8 is subjected to the prescribed signal processing by the general controller 211, which is then transferred to the VRAM 210, and displayed on the LCD 10. A card I/F 212 is an interface for writing and reading image data into and from the memory card 8. A communication I/F 213 is an interface based on, for example, the USB standard, or an interface for wireless communication for externally connecting the PC 1000.

A flash control circuit 214 controls light emission of the built-in flash device 5. In particular, the flash control circuit 214 controls the quantity of flash light, flash timing, and so on, based on the control signal supplied from the general controller 211. The flash control circuit 214 also brings the light emission to zero based on the flash stop signal STP input from the light-quantity adjusting circuit 304.

An RTC (Real Time Clock) 219 is a time circuit for keeping the track of the date and time of each photograph, which is driven by a separate power source (not shown).

An operation unit 250 is an I/F for the general controller 211 and includes the UP key 6, the DOWN key 7, the shutter button 7, the FL mode setting key 11, the compression rate setting key 12, and the photographing/reproduction mode setting switch 14 and

the like.

The general controller 211 is composed of a microcomputer, and it organically controls the driving timing of each element in the photographing unit 3 and the main body 2 so as to generally control the photographing operation of the digital camera 1.

If, in the photographing mode, the shutter button 9 is pressed to start photographing, the general controller 211 creates tag information (such as the frame number, exposure value, shutter speed, compression rate K, photographing date and time, flash ON/OFF data, scene information, image determination result, etc), store the tag information in the memory card 8, together with the thumbnail image created from the image taken in the image memory 209 after the start of the photographing operation, and the compressed image created by a JPEG method at a predetermined compression rate K.

The memory card 8 can store forty frames of images taken by the digital camera 1 at a compression rate of 1/20. Each of the frames has tag information, high-resolution image data (640×480 pixels) compressed by a JPEG method, and thumbnail image data (80 x 60 pixels). Each frame may be treated as an image file of, for example, an EXIF format.

Fig. 5 illustrates the overall structure of the network system using the digital camera described above.

In the network system (NWS) according to this embodiment, in addition to the desktop computer PC 1000, a second computer PC 2000 is connected to the network (NW) via the network hub

(hub) and the ethernet cables CBL1 and CBL2. Although not shown in the figure, some other computers are also connected to the network NW. A modem MDM2 is connected to the second computer PC 2000 via the USB port. The second computer PC 2000 can communicate with a remote computer PC 3000, to which a modem MDM3 is connected, via another network NET using the telephone line (Tel).

Keyboards K1, K2 and K3, each having a return key ENT and an escape Key ESC, and mouses M1, M2 and M3 are connected to the main bodies of the computers PC 1000, PC 2000 and PC 3000, respectively, via the USB cables. The computers also have hard disc drives HD1, HD2 and HD3.

Driver software for detecting the connection of the digital camera 1 is installed in the hard disc drive HD1 of the first computer PC 1000. Magneto-optic discs MO1 and MO2 are also available in the second PC 2000 and the remote PC 3000. A printer Pri is connected to the second PC 2000 via the USB interface.

If the digital camera 1 is connected to the USB port of the keyboard K1 of the PC 1000 when the computers PC 1000, PC 2000 and PC 3000 are in the ON states, an icon Ci representing the digital camera 1 is displayed on the monitor screen 1001 of the PC 1000, as shown in Fig. 7(a). Besides the camera icon Ci, data/application icons (Icon), holder icons (Folder), and an icon (cC) representing the computer itself are also displayed on the monitor screen 1001. A window 1003 is opened in this example. Since the digital camera 1 is now in connection with the PC 1000,

a cable is displayed between the camera icon Ci and the computer icon cC on the monitor screen 1001.

The window 1003 is open to indicate the hardware sources connected to the network NW, and the entire arrangement of the network NW shown in Fig. 5 is graphically shown in this window.

Symbols PC1, PC2, and PC3 are assigned to the computers PC 1000, PC 2000 and PC 3000 in the monitor screen.

Fig. 6 shows a screen transition diagram of the network system. The relationship between the digital camera 1 and the first PC 1000 is mainly explained as follows.

In Fig. 6, in a case where the digital camera 1 is not connected to the computer PC 1000, it is possible for the user to select a preferable mode between the reproduction mode and the photographing mode by operating the mode setting switch 14. In the reproduction mode, the photographed image is displayed on the display 10 of the digital camera 1 (D1), and in the photographing mode, a live-view image is displayed on the display 10 of the digital camera 1 (D2).

In either state D1, D2, when the digital camera 1 is connected to the first PC 1000, the driver software pre-installed in the first PC 1000 detects the connection of the digital camera 1, and the screen 1001 of the PC 1000 transits to the screen D10 shown in Fig. 7(a). At the same time, the screen of the display 10 of the digital camera 1 also transits to the screen D10 shown in Fig. 7(b). On the other hand, when the digital camera 1 is disconnected from the first PC 1000, the screen 1001 of the PC as well as the screen of the digital camera 1 (D10) return to the

original screen (D1 or D2), respectively.

In the screen D10, as shown in Figs. 7(a) and 7(b), the screen of the display 10 of the digital camera 1 coincides with that of the display 1001 of the first PC 1000. However, the display 10 of the digital camera 1 has a resolution of 240×320 dots, and the display of the PC 1000 has a resolution of 600×800 dots, for example. Therefore, the display 10 of the digital camera 1 displays by thinning out the whole screen of the PC. (X, Y) and (x, y) denote X-Y coordinates of the display of the PC 1000 and the display 10 of the digital camera 1, respectively, and the unit of each coordinate is a pixel. This directly corresponds to the address of VRAM (Video RAM).

If the mouse cursor displayed on the display 1001 of the PC 1000 is also reduced to be displayed on the display 10 of the digital camera 1, the mouse cursor is displayed as an arrow marked "Mouse 2" shown in Fig. 7(b), which is very hard to be recognized on the display 10 of the digital camera 1. To avoid this disadvantage, only the mouse cursor is not reduced to be displayed on the display 10 of the digital camera 1 as an arrow marked "Mouse 1" shown in Fig. 7(b).

In accordance with the operation of the trackball TR of the digital camera 1, not only the mouse cursor on the screen of the PC 1000 but the mouse cursor on the display of the digital camera 1 move in a synchronized manner. This allows the user to drag the icon, or to manipulate the button on the window, for example, as if the user operates the PC 1000 by using the mouse thereof. The relationship between the operation switches (manipulation

devices) of the digital camera and the manipulation devices of the PC is shown in Table 1. As is apparent from the Table 1, it is possible for the user not only to move the mouse cursor but to operate the PC by operating the switch of the digital camera
5 1 corresponding to the manipulation device of the PC 1000.

Table 1

Switches of the digital camera	Manipulation devices of the PC
Trackball TR	Mouse M
DOWN key 7	Left button L of the mouse
UP key 6	Right button R of the mouse
Shutter button 9	Enter key ENTER
FL mode setting switch 11	Escape key ESC

If the function key F2 is pressed, the screen transits to the folder specify screen D12 as shown in Figs. 8(a) and 8(b). The function key F2 is used to specify a folder when the photographed data of the digital camera 1 is transferred to the PC 1000. When the function key F2 is pressed, the dialogue 1004 for specifying a folder to store the photographed data is
5 displayed on the screen 1001 of the PC 1000. At the same time, as shown in Fig. 8(b), the same dialogue is displayed on the display 10 of the digital camera 1.

In this dialogue 1004, the folders PC2\YY3\ZZ2 in the Magneto-optic disc M02 of the PC 2000 is specified as a folder
25 for storing the photographed data of the digital camera 1. By scrolling this dialogue, any folder of a desired PC (including the PC 3000 which is connected to the network via the telephone

line Tel, the modem MDM2 and the modem MDM3) connected to the network can be specified. Thus, any desired folder in the PC 1000, PC 2000 and PC 3000 can be specified for storing the photographed data of the digital camera.

5 As shown in Fig. 8, if the folder PC2\YY3\ZZ2, for example, is selected and then clicked, the folder is framed. In this state, if the OK button is clicked (the mouse cursor is moved onto the OK button by using the trackball TR, and then the DOWN key 7 is pressed), the dialogue is closed in a state that the folder is selected, and returns to the screen D10. Thus, a folder of the PC in which the photographed data is to be stored can be specified by the digital camera 1 side.

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
Next, in Fig. 6, if the function key F1 is pressed, the screen transits to the photographed data transit screen D13 shown in Figs. 9(a) and 9(b). In the function key F1, a function for executing a transfer of the photographed data of the digital camera 1 to the PC 1000 is previously registered. When the function key F1 is pressed, a dialogue showing that the photographed data is being transferred is displayed on the display 1001 of the PC 1000. At the same time, as shown in Fig. 9(b), the same dialogue is displayed on the display 10 of the digital camera 1. This dialogue includes an upper progress bar showing the current transferring frame number and its current state and a lower progress bar showing the total number of frames to be transferred and its current state. By pressing the transfer stop button, it is possible for the user to interrupt the transferring. After the completion or the interruption of

the transfer, the screen returns to D10.

If the function key F3 is pressed in the screen D10, the screen D10 transits to a display area change screen D11 in accordance with the display magnification rate change at the digital camera 1. In a case where it is too small for the user to recognize the screen 1001 of the PC 1000 in a whole display screen D10, by pressing the function key F3 twice, the display magnification rate is changed to 50%. The "50%" means that the thinning out rate of the displayed data is 50%, in other words, among the whole screen 1001 of the PC 1000(600 × 800 dots), twice the area of the display 10 of the digital camera 1 (240 × 320 dots), i.e., the area of 480 × 640 dots, is displayed. In the screen D 11, a preferable display area is selected.

Though the display area change screen D11 shown in Fig. 10 is displayed on the display of the digital camera, the screen of the PC remains D10. In the screen of the digital camera 1, a broken-line frame is displayed at the left side of the screen D10, and the mouse cursor is changed into a moving cursor. The broken-line frame shows a display area when the display magnification rate is set 50%, and can be horizontally moved by operating the trackball TR. By pressing the function key F3 again after the broken-line frame is moved to a desired position, the screen transits to the 50% display screen D20 as shown in Fig. 10(b). In the screen D20, though the display magnification rate is different, the relationship between the operation members of the digital camera and the PC is the same as in the screen D10. Since only a portion of the screen of the PC is displayed,

vertical and horizontal scroll bars are displayed.

By pressing the function key F3 in the screen D20, a display area change screen is displayed in accordance with the display magnification rate change when the screen D20 transits to the screen D30 shown in Fig 10(c). Though the display magnification rate and the size of the broken-line frame are different from those of the screen D11, the operation is the same as in the screen D11.

By pressing the function key F3 again, the screen transits to the 100% display screen D30. The 100% display screen means that the screen of the PC 1000 of 600×800 dots is displayed on the screen 10 of the digital camera 1 of 240×320 dots without thinning out. Only the area of 240×320 dots among the whole screen of the PC 1000 is displayed as shown in Fig. 10(c). By pressing the function key F3, the screen returns to the screen D10.

The data transferring display screen D23, D33, to which the screen D20, D30 transits by pressing the function key F1, is the same as the screen D13 shown Fig. 9, except for the display magnificent rates and the scroll bars displayed on the screen 10 of the digital camera 1. The folder specifying screen D22, D32, to which the screen D20, D30 transits by pressing the function key F2, is the same as the screen D12 shown in Fig. 8, except for the display magnificent rates and the scroll bars displayed on the screen 10 of the digital camera 1.

As explained above, the digital camera 1 can be connected to the PC 1000 (PC 2000, PC 3000) connected to the network NW

as a part of the network and the photographed data can be processed by the operation of the digital camera 1 side. Accordingly, the digital camera 1 becomes a part of the network without adding a special function specifically designed for the network to the digital camera 1, which allows the user to utilize various sources such as image data on the network NW.

Further, since no additional spacial functions are required, the digital camera can be kept compact without increasing the power consumption.

In addition, since the second PC 2000 and the remote PC 3000 are connected each other via the telephone line Tel, sources on the network can be utilized without changing the existing apparatuses.

Next, the warning screen D40 shown in Fig. 6 will be explained.

In a case where some warning is required as a system NWS in which the digital camera 1 is connected to the PC 1000, the screen transits to the warning screen D40. The following is an example of a warning when the PC 2000 is disconnected from the network NW during the data transferring, with reference to Figs. 11(a) and 11(b). When the PC is disconnected from the network, a warning dialogue is displayed on the centre portion of the screen 1001 of the PC 1000, as shown in Fig. 11(a). On the other hand, displayed on the display 10 of the digital camera 1 is a warning message only as shown in Fig. 11(b). The reason why the warning screen of the PC and that of the digital camera are different is as follows.

In a case where a warning dialogue is to be displayed, it is required to convey some messages to the user. However, as mentioned above, even if the display 1001 of the PC 1000 can appropriately display a warning dialogue, the display 10 of the digital camera 1 may not be able to appropriately display the same dialogue because of the different resolution of the display 10 of the digital camera 1 and the display 1001 of the PC 1000. Accordingly, although the screen 10 of the digital camera 1 and the screen 1001 of the PC 1000 are synchronized in a normal state, in a case where a warning dialogue is to be displayed, the warning message is surely conveyed to the user by displaying in a different manner between the digital camera 1 and the PC 1000.

The synchronized control of the screen of the digital camera 1 and that of the PC 1000 when it is determined if an event is occurred, will be explained as follows, with reference to the flowchart of Fig. 12.

In the following explanation, though the first PC 1000 is exemplified as a PC, the other PC such as PC 2000 or PC 3000 may also be applied in the same manner.

In Fig. 12 and the following explanation, "Step" will be referred to as "S".

1. In a case where an event is occurred in the PC.

In step S1301, it is determined if the PC 1000 detected an event, such as a connection of the digital camera 1, an operation of the key board K1 or the mouse M1, an error and an interruption from the outside, is occurred. If such an event is detected (YES in S1301), the fact that an event is occurred and the content of

the event as well as the position of the mouse M1 of the PC 1000, is noticed to the digital camera 1 in S1302, and the result of the event is displayed on the screen 1001 of the PC in S1303. Thus, the VRAM (video RAM) data of the PC 1000 is updated. 5 Thereafter, the PC 1000 transmits the VRAM data to the digital camera 1 in S1304.

In Step 131, if the digital camera 1 receives an event signal from the PC 1000, the digital camera 1 analyses it and determines if a warning is concerned with an error in S132. If NO in S132, the digital camera 1 waits to receive a VRAM data from the PC 1000 in S133.

If the digital camera 1 receives the VRAM data from the PC 1000 (YES in S133), a coordinate transformation is conducted in S134. This transformation is to allocate the coordinate (X, Y) of the VRAM data transmitted from the PC 1000 into the coordinate (x, y) of the VRAM of the digital camera 1. The process differs depending on the current screen mode of the PC 1000 or that of the digital camera 1. Provided that the screen of the PC 1000 has 600 × 800 dots, the screen of the digital camera 1 has 240 × 320 dots and that the screen of D10, D12 or D13 in which the whole screen of the PC is displayed is displayed, x and y will be allocated to $x=320/800 \cdot X$, $y=240/600 \cdot Y$, respectively.

After transforming the coordinate, in S135, the received data are allocated on the VRAM address (x, y) of the digital camera 1. Thus, the screen 10 of the digital camera 1 coincides with the screen 1001 of the PC 1000. Further, in S135, only the data of the mouse cursor are formed by the digital camera 1 based

on the position data received in S133, and are updated on the allocated data.

If the event received in S132 is a warning, a warning screen D40 is displayed in S136.

5 Thus, the process in a case where an event is occurred at the PC side, terminates.

2. In a case where an event is occurred in the digital camera.

10 If an event is occurred in the digital camera 1 by operating the switches of the digital camera 1 in S137, the content of the event and the coordinate (x, y) at which the event is occurred are noticed to the PC 1000 in S138. In Step 1305, the PC 1000 receives the event and analyses it, and then transforms the coordinate into (X, Y) corresponding to the screen of the PC 1000. The transformation can be performed by calculating
15 $X=800/320 \cdot x$ and $Y=600/240 \cdot y$, each of which is a reversed operation expression of the above operation expression. Then, in S1307, the result of the event is displayed on the screen 1001 of the PC 1000 and the VRAM data of the PC 1000 is updated. In S1308, the VRAM data of the PC 1000 is transmitted to the digital
20 camera 1.

On the other hand, in S139, the digital camera 1 waits the updated VRAM data of the PC after notifying the PC 1000 of the occurrence of the event in S138. If the digital camera 1 received the data, in S140, a coordinate transformation, which
25 is similar to that in S134, is conducted to allocate the data on the VRAM of the digital camera 1 in S141.

The reason why the event is notified to the PC 1000 to

update the screen corresponding to the event at the PC 1000 side and then the updated screen is transmitted to the digital camera 1 again is as follows. If calculated based on the (x, y) system which is poor in screen resolution, and then the calculated data are corrected by the (X, Y) system, a computational error occurs, which causes a screen disorder of the PC 1000.

A method for registering an action to function keys F1-F3 will be explained, with reference to Figs. 6 and 13.

By simultaneously pressing both the function keys F1-F3 and the shutter button 9, the screen transits to D50, regardless that the digital camera 1 is connected or not connected to the PC 1000. In this embodiment, the currently registered action of the function key F1 (F2, F3) is displayed as a boldfaced characters with an underline, and is changed to the next function in turn by pressing the UP key 6/the DOWN key 7. By pressing the shutter button 9, the changed results become effective and the screen returns to the screen in which D50 was called. By pressing the FL mode setting key 11, the changed results become invalid and the screen returns to the screen in which D50 was called. In this embodiment, examples of the action include "data transfer" in which the image data photographed by the digital camera 1 is transferred to the PC 1000, "specifying data transfer destination folder" which is used when transferring the image data photographed by the digital camera 1 to the PC 1000, "changing the screen magnification rate" by which the screen display magnification rate of the digital camera 1 is changed when the digital camera 1 is connected to the PC 1000, "turning off the

power source of the PC", "displaying the image data in the PC", "executing an application in the PC" and "transferring the image data to the PC immediately after photographing".

Next, a process for printing out the photographed image data will be explained with reference to Fig. 14.

The printer connected to the second computer PC 2000 starts a printing operation if the window 1005 showing the folders storing the photographed data is opened in the display screen 10 of the digital camera 1, and a desired folder is dragged to the printer icon shown in the network display window 1003, as indicated by the arrows in Fig. 14.

By manipulating the display screen 10 of the digital camera 1, the user can print out the image data taken by the digital camera 1 from the printer connected to the network NW. Thus, the hard copy of the image data is promptly obtained.

Next, a process for executing the application software of the first PC 1000 from the digital camera side will be explained with reference to Fig. 15.

If the icon representing the application software execution file of the first PC 1000 is selected on the display screen 10 of the digital camera 1, and the shutter button 9 is pressed, then the selected application is activated. In this example, the e-mail software is selected and activated. The application itself is executed in the PC 1000, and the corresponding steps are displayed on the display screen 10 of the digital camera 1, as shown in the flowchart of Fig. 12. The application software activated from the digital camera side is not limited to the e-

mail software, but includes any other applications installed in the computers connected to the network. For example, data base software may be activated by manipulating the operation unit of the digital camera 1.

5 The user can receive and read e-mails using the digital camera 1 in the same manner as activating the e-mail software from the first PC 1000. In this case, the display screen 10 of the digital camera 1 exhibits the same picture as that displayed on the monitor screen 1001 of the first PC 1000. Accordingly, any applications executable in the first PC 1000 can be executed by the digital camera 1 even if such applications are stored in the other media, such as the hard disc drives HD2 or HD3 of the other computers PC 2000 or PC 3000.

10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995
1000
1005
1010
1015
1020
1025
1030
1035
1040
1045
1050
1055
1060
1065
1070
1075
1080
1085
1090
1095
1100
1105
1110
1115
1120
1125
1130
1135
1140
1145
1150
1155
1160
1165
1170
1175
1180
1185
1190
1195
1200
1205
1210
1215
1220
1225
1230
1235
1240
1245
1250
1255
1260
1265
1270
1275
1280
1285
1290
1295
1300
1305
1310
1315
1320
1325
1330
1335
1340
1345
1350
1355
1360
1365
1370
1375
1380
1385
1390
1395
1400
1405
1410
1415
1420
1425
1430
1435
1440
1445
1450
1455
1460
1465
1470
1475
1480
1485
1490
1495
1500
1505
1510
1515
1520
1525
1530
1535
1540
1545
1550
1555
1560
1565
1570
1575
1580
1585
1590
1595
1600
1605
1610
1615
1620
1625
1630
1635
1640
1645
1650
1655
1660
1665
1670
1675
1680
1685
1690
1695
1700
1705
1710
1715
1720
1725
1730
1735
1740
1745
1750
1755
1760
1765
1770
1775
1780
1785
1790
1795
1800
1805
1810
1815
1820
1825
1830
1835
1840
1845
1850
1855
1860
1865
1870
1875
1880
1885
1890
1895
1900
1905
1910
1915
1920
1925
1930
1935
1940
1945
1950
1955
1960
1965
1970
1975
1980
1985
1990
1995
2000
2005
2010
2015
2020
2025
2030
2035
2040
2045
2050
2055
2060
2065
2070
2075
2080
2085
2090
2095
2100
2105
2110
2115
2120
2125
2130
2135
2140
2145
2150
2155
2160
2165
2170
2175
2180
2185
2190
2195
2200
2205
2210
2215
2220
2225
2230
2235
2240
2245
2250
2255
2260
2265
2270
2275
2280
2285
2290
2295
2300
2305
2310
2315
2320
2325
2330
2335
2340
2345
2350
2355
2360
2365
2370
2375
2380
2385
2390
2395
2400
2405
2410
2415
2420
2425
2430
2435
2440
2445
2450
2455
2460
2465
2470
2475
2480
2485
2490
2495
2500
2505
2510
2515
2520
2525
2530
2535
2540
2545
2550
2555
2560
2565
2570
2575
2580
2585
2590
2595
2600
2605
2610
2615
2620
2625
2630
2635
2640
2645
2650
2655
2660
2665
2670
2675
2680
2685
2690
2695
2700
2705
2710
2715
2720
2725
2730
2735
2740
2745
2750
2755
2760
2765
2770
2775
2780
2785
2790
2795
2800
2805
2810
2815
2820
2825
2830
2835
2840
2845
2850
2855
2860
2865
2870
2875
2880
2885
2890
2895
2900
2905
2910
2915
2920
2925
2930
2935
2940
2945
2950
2955
2960
2965
2970
2975
2980
2985
2990
2995
3000
3005
3010
3015
3020
3025
3030
3035
3040
3045
3050
3055
3060
3065
3070
3075
3080
3085
3090
3095
3100
3105
3110
3115
3120
3125
3130
3135
3140
3145
3150
3155
3160
3165
3170
3175
3180
3185
3190
3195
3200
3205
3210
3215
3220
3225
3230
3235
3240
3245
3250
3255
3260
3265
3270
3275
3280
3285
3290
3295
3300
3305
3310
3315
3320
3325
3330
3335
3340
3345
3350
3355
3360
3365
3370
3375
3380
3385
3390
3395
3400
3405
3410
3415
3420
3425
3430
3435
3440
3445
3450
3455
3460
3465
3470
3475
3480
3485
3490
3495
3500
3505
3510
3515
3520
3525
3530
3535
3540
3545
3550
3555
3560
3565
3570
3575
3580
3585
3590
3595
3600
3605
3610
3615
3620
3625
3630
3635
3640
3645
3650
3655
3660
3665
3670
3675
3680
3685
3690
3695
3700
3705
3710
3715
3720
3725
3730
3735
3740
3745
3750
3755
3760
3765
3770
3775
3780
3785
3790
3795
3800
3805
3810
3815
3820
3825
3830
3835
3840
3845
3850
3855
3860
3865
3870
3875
3880
3885
3890
3895
3900
3905
3910
3915
3920
3925
3930
3935
3940
3945
3950
3955
3960
3965
3970
3975
3980
3985
3990
3995
4000
4005
4010
4015
4020
4025
4030
4035
4040
4045
4050
4055
4060
4065
4070
4075
4080
4085
4090
4095
4100
4105
4110
4115
4120
4125
4130
4135
4140
4145
4150
4155
4160
4165
4170
4175
4180
4185
4190
4195
4200
4205
4210
4215
4220
4225
4230
4235
4240
4245
4250
4255
4260
4265
4270
4275
4280
4285
4290
4295
4300
4305
4310
4315
4320
4325
4330
4335
4340
4345
4350
4355
4360
4365
4370
4375
4380
4385
4390
4395
4400
4405
4410
4415
4420
4425
4430
4435
4440
4445
4450
4455
4460
4465
4470
4475
4480
4485
4490
4495
4500
4505
4510
4515
4520
4525
4530
4535
4540
4545
4550
4555
4560
4565
4570
4575
4580
4585
4590
4595
4600
4605
4610
4615
4620
4625
4630
4635
4640
4645
4650
4655
4660
4665
4670
4675
4680
4685
4690
4695
4700
4705
4710
4715
4720
4725
4730
4735
4740
4745
4750
4755
4760
4765
4770
4775
4780
4785
4790
4795
4800
4805
4810
4815
4820
4825
4830
4835
4840
4845
4850
4855
4860
4865
4870
4875
4880
4885
4890
4895
4900
4905
4910
4915
4920
4925
4930
4935
4940
4945
4950
4955
4960
4965
4970
4975
4980
4985
4990
4995
5000
5005
5010
5015
5020
5025
5030
5035
5040
5045
5050
5055
5060
5065
5070
5075
5080
5085
5090
5095
5100
5105
5110
5115
5120
5125
5130
5135
5140
5145
5150
5155
5160
5165
5170
5175
5180
5185
5190
5195
5200
5205
5210
5215
5220
5225
5230
5235
5240
5245
5250
5255
5260
5265
5270
5275
5280
5285
5290
5295
5300
5305
5310
5315
5320
5325
5330
5335
5340
5345
5350
5355
5360
5365
5370
5375
5380
5385
5390
5395
5400
5405
5410
5415
5420
5425
5430
5435
5440
5445
5450
5455
5460
5465
5470
5475
5480
5485
5490
5495
5500
5505
5510
5515
5520
5525
5530
5535
5540
5545
5550
5555
5560
5565
5570
5575
5580
5585
5590
5595
5600
5605
5610
5615
5620
5625
5630
5635
5640
5645
5650
5655
5660
5665
5670
5675
5680
5685
5690
5695
5700
5705
5710
5715
5720
5725
5730
5735
5740
5745
5750
5755
5760
5765
5770
5775
5780
5785
5790
5795
5800
5805
5810
5815
5820
5825
5830
5835
5840
5845
5850
5855
5860
5865
5870
5875
5880
5885
5890
5895
5900
5905
5910
5915
5920
5925
5930
5935
5940
5945
5950
5955
5960
5965
5970
5975
5980
5985
5990
5995
6000
6005
6010
6015
6020
6025
6030
6035
6040
6045
6050
6055
6060
6065
6070
6075
6080
6085
6090
6095
6100
6105
6110
6115
6120
6125
6130
6135
6140
6145
6150
6155
6160
6165
6170
6175
6180
6185
6190
6195
6200
6205
6210
6215
6220
6225
6230
6235
6240
6245
6250
6255
6260
6265
6270
6275
6280
6285
6290
6295
6300
6305
6310
6315
6320
6325
6330
6335
6340
6345
6350
6355
6360
6365
6370
6375
6380
6385
6390
6395
6400
6405
6410
6415
6420
6425
6430
6435
6440
6445
6450
6455
6460
6465
6470
6475
6480
6485
6490
6495
6500
6505
6510
6515
6520
6525
6530
6535
6540
6545
6550
6555
6560
6565
6570
6575
6580
6585
6590
6595
6600
6605
6610
6615
6620
6625
6630
6635
6640
6645
6650
6655
6660
6665
6670
6675
6680
6685
6690
6695
6700
6705
6710
6715
6720
6725
6730
6735
6740
6745
6750
6755
6760
6765
6770
6775
6780
6785
6790
6795
6800
6805
6810
6815
6820
6825
6830
6835
6840
6845
6850
6855
6860
6865
6870
6875
6880
6885
6890
6895
6900
6905
6910
6915
6920
6925
6930
6935
6940
6945
6950
6955
6960
6965
6970
6975
6980
6985
6990
6995
7000
7005
7010
7015
7020
7025
7030
7035
7040
7045
7050
7055
7060
7065
7070
7075
7080
7085
7090
7095
7100
7105
7110
7115
7120
7125
7130
7135
7140
7145
7150
7155
7160
7165
7170
7175
7180
7185
7190
7195
7200
7205
7210
7215
7220
7225
7230
7235
7240
7245
7250
7255
7260
7265
7270
7275
7280
7285
7290
7295
7300
7305
7310
7315
7320
7325
7330
7335
7340
7345
7350
7355
7360
7365
7370
7375
7380
7385
7390
7395
7400
7405
7410
7415
7420
7425
7430
7435
7440
7445
7450
7455
7460
7465
7470
7475
7480
7485
7490
7495
7500
7505
7510
7515
7520
7525
7530
7535
7540
7545
7550
7555
7560
7565
7570
7575
7580
7585
7590
7595
7600
7605
7610
7615
7620
7625
7630
7635
7640
7645
7650
7655
7660
7665
7670
7675
7680
7685
7690
7695
7700
7705
7710
7715
7720
7725
7730
7735
7740
7745
7750
7755
7760
7765
7770
7775
7780
7785
7790
7795
7800
7805
7810
7815
7820
7825
7830
7835
7840
7845
7850
7855
7860
7865
7870
7875
7880
7885
7890
7895
7900
7905
7910
7915
7920
7925
7930
7935
7940
7945
7950
7955
7960
7965
7970
7975
7980
7985
7990
7995
8000
8005
8010
8015
8020
8025
8030
8035
8040
8045
8050
8055
8060
8065
8070
8075
8080
8085
8090
8095
8100
8105
8110
8115
8120
8125
8130
8135
8140
8145
8150
8155
8160
8165
8170
8175
8180
8185
8190
8195
8200
8205
8210
8215
8220
8225
8230
8235
8240
8245
8250
8255
8260
8265
8270
8275
8280
8285
8290
8295
8300
8305
8310
8315
8320
8325
8330
8335
8340
8345
8350
8355
8360
8365
8370
8375
8380
8385
8390
8395
8400
8405
8410
8415
8420
8425
8430
8435
8440
8445
8450
8455
8460
8465
8470
8475
8480
8485
8490
8495
8500
8505
8510
8515
8520
8525
8530
8535
8540
8545
8550
8555
8560
8565
8570
8575
8580
8585
8590
8595
8600
8605
8610
8615
8620
8625
8630
8635
8640
8645
8650
8655
8660
8665
8670
8675
8680
8685
8690
8695
8700
8705
8710
8715
8720
8725
8730
8735
8740
8745
8750
8755
8760
8765
8770
8775
8780
8785
8790
8795
8800
8805
8810
8815
8820
8825
8830
8835
8840
8845
8850
8855
8860
8865
8870
8875
8880
8885
8890
8895
8900
8905
8910
8915
8920
8925
8930
8935
8940
8945
8950
8955
8960
8965
8970
8975
8980
8985
8990
8995
9000
9005
9010
9015
9020
9025
9030
9035
9040
9045
9050
9055
9060
9065
9070
9075
9080
9085
9090
9095
9100
9105
9110
9115
9120
9125
9130
9135
9140
9145
9150
9155
9160
9165
9170
9175
9180
9185
9190
9195
9200
9205
9210
9215
9220
9225
9230
9235
9240
9245
9250
9255
9260
9265
9270
9275
9280
9285
9290
9295
9300
9305
9310
9315
9320
9325
9330
9335
9340
9345
9350
9355
9360
9365
9370
9375
9380
9385
9390
9395
9400
9405
9410
9415
9420
9425
9430
9435
9440
9445
9450
9455
9460
9465
9470
9475
9480
9485
9490
9495
9500
9505
9510
9515
9520
9525
9530
9535
9540
9545
9550
9555
9560
9565
9570
9575
9580
9585
9590
9595
9600
9605
9610
9615
9620
9625
9630
9635
9640
9645
9650
9655
9660
9665
9670
9675
9680
9685
9690
9695
9700
9705
9710
9715
9720
9725
9730
9735
9740
9745
9750
9755
9760
9765
9770
9775
9780
9785
9790
9795
9800
9805
9810
9815
9820
9825
9830
9835
9840
9845
9850
9855
9860
9865
9870
9875
9880
9885
9890
9895
9900
9905
9910
9915
9920
9925
9930
9935
9940
9945
9950
9955
9960
9965
9970
9975
9980
9985
9990
9995
10000
10005
10010
10015
10020
10025
10030
10035
10040
10045
10050
10055
10060
10065
10070
10075
10080
10085
10090
10095
10100
10105
10110
10115
10120
10125
10130
10135
10140
10145
10150
10155
10160
10165
10170
10175
10180
10185
10190
10195
10200
10205
10210
10215
10220
10225
10230
10235
102

data (e.g., image data) as sources on the network by manipulating the digital camera, while monitoring the network structure on the display unit of the digital camera. Since the user can use any sources on the network through the digital camera, which
5 functions as a communication medium via a network computer, without adding any special functions dedicated to the network, the dimensions of the network media expand, while the power consumption and the size of the digital camera can be maintained small.

10 If at least two computers are connected to each other via the telephone line, the user can use the network sources from the remote place.

Even if the amount of image data taken by the digital camera become massive, the image data can be stored in the network computer as the network source, and undesirable image data loss
15 can be prevented.

If the user activates and executes an application software stored in the network computer from the digital camera side, the data can be processed using that application software.

20 For example, if the e-mail software is activated, the user can e-mail using the digital camera.

Furthermore, the user can print out desired image data by activating the printer from the digital camera side, and can obtain the hard copy print immediately.

25 Although the present invention has been described based on the preferred embodiment, the terms and the sentences used in this specification are explanatory, and not limiting the present

invention. It should be appreciated that there are many modifications and substitutions without departing from the spirit and scope of the present invention.

03221936, 044499

WHAT IS CLAIMED IS:

1. A photographing apparatus connectable to a network to which a plurality of image processing apparatuses are connected via cables or by wireless, the photographing apparatus, comprising:

5 an interface for connecting the photographing apparatus to the network;

a display for displaying a network structure; and

an operation unit for allowing image data taken by said photographing apparatus to be processed on the network.

2. The photographing apparatus according to claim 1, wherein the photographing apparatus is capable of causing any of the image processing apparatuses connected to the network to record the image data photographed by said photographing apparatus.

3. The photographing apparatus according to claim 1, wherein the photographing apparatus is capable of causing a printer connected to the network to print out the image data photographed by the photographing apparatus.

4. A photographing apparatus connectable to a network to which a plurality of image processing apparatuses are connected via cables or by wireless, the photographing apparatus, comprising:

an interface for connecting the photographing apparatus to the network;

a display for displaying a network structure; and

an operation unit for executing a program recorded in each
5 image processing apparatus connected to the network.

5. The photographing apparatus according to claim 4, wherein the program is an e-mail program.

6. A network system to which a photographing apparatus and a plurality of image processing apparatuses are connected via cables or by wireless, the photographing apparatus comprising:

an interface for connecting the photographing apparatus to the network;

a display for displaying a network structure; and

an operation unit for allowing the image data taken by the photographing apparatus to be processed on the network.

7. The network system according to claim 6, wherein the photographing apparatus is capable of causing any of the image processing apparatuses connected to the network to record the image data photographed by the photographing apparatus.

8. The network system according to claim 6, wherein the photographing apparatus is capable of causing a printer connected to the network to print out the photographed image data.

9. A network system to which a photographing apparatus and a plurality of image processing apparatuses are connected via cables or by wireless, the photographing apparatus comprising:

an interface for connecting the photographing apparatus to
5 the network;

a display for displaying a network structure; and

an operation unit for executing a program recorded in each image processing apparatus connected to the network.

10. The network system according to claim 9, wherein the program is an e-mail program.

ABSTRACT OF THE DISCLOSURE

A photographing apparatus is connectable to a network to which a plurality of image processing apparatuses are connected via cables or by wireless. The photographing apparatus comprises an interface for connecting the photographing apparatus to the network, a display for displaying the network structure, and an operation unit for allowing image data taken by the photographing apparatus to be processed on the network.

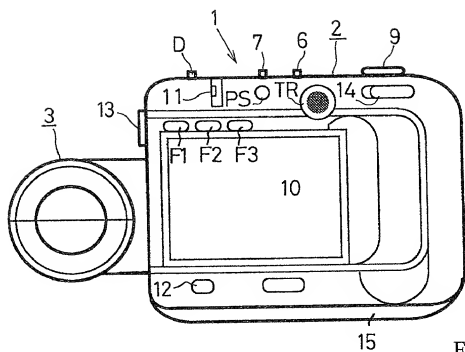


FIG. 2

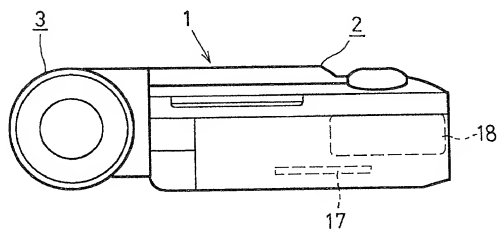


FIG. 3

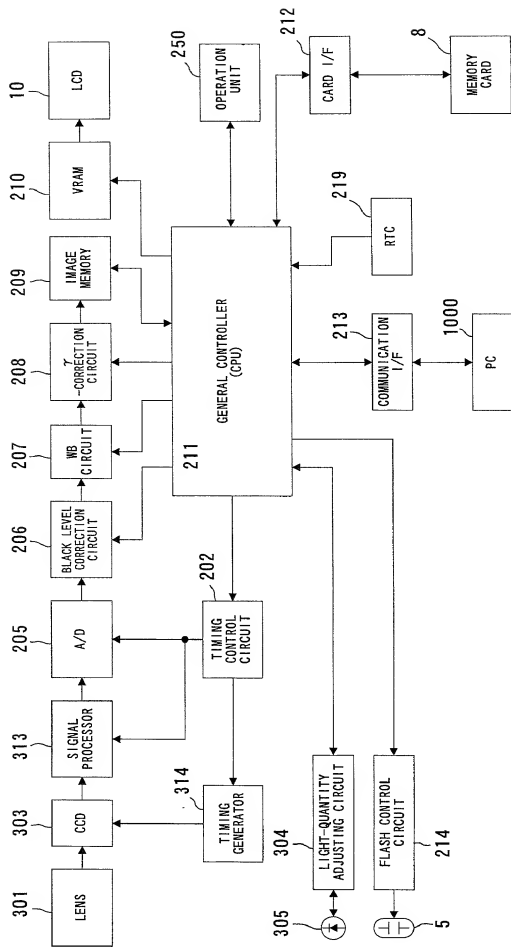


FIG. 4

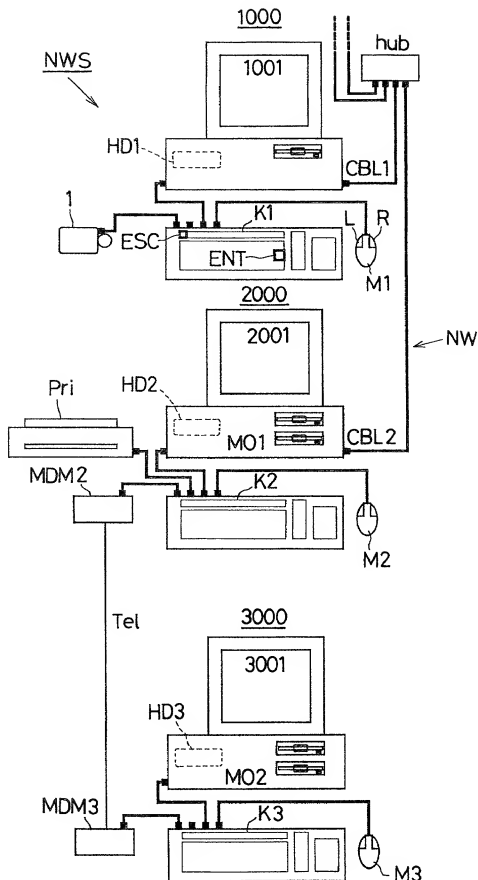


FIG. 5

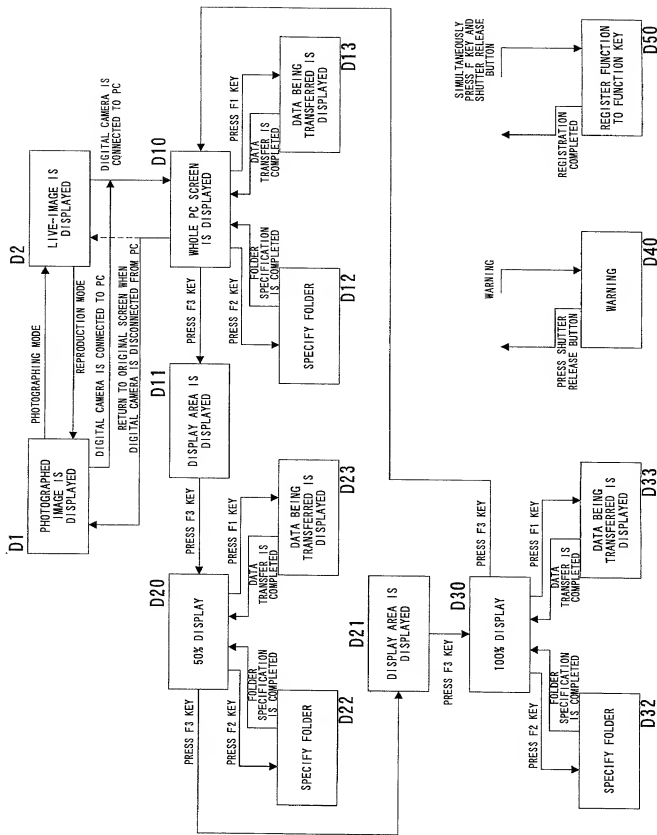


FIG. 6

SCREEN OF THE PC (D10)

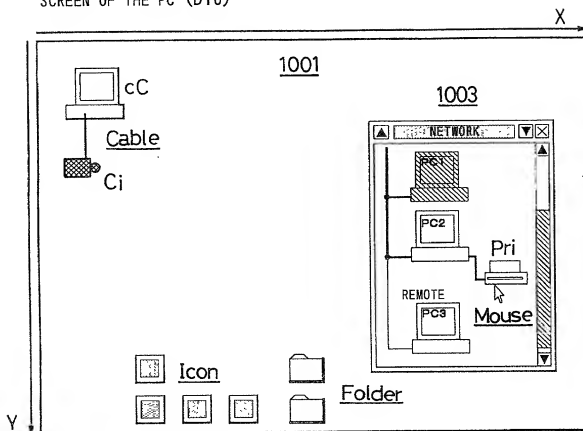


FIG.7(a)

SCREEN OF THE DIGITAL CAMERA (D10)




FIG.7(b)

SCREEN OF PC (D12)

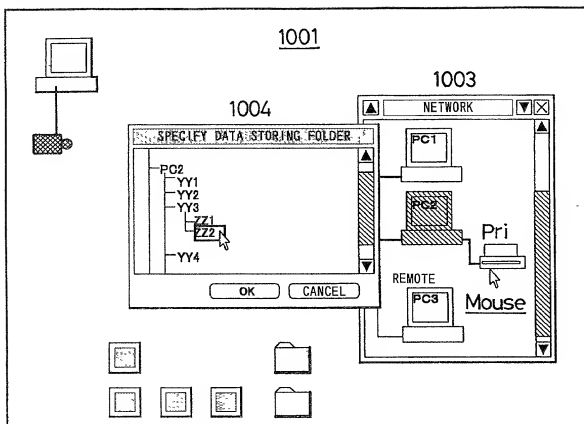


FIG.8(a)

SCREEN OF DIGITAL CAMERA (D12)




FIG.8(b)

SCREEN OF PC (D13)

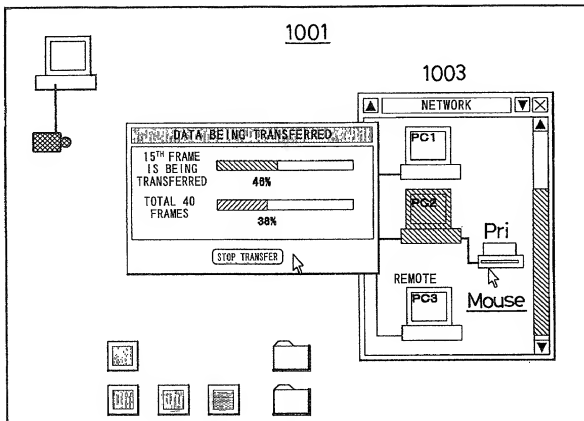


FIG.9(a)

SCREEN OF DIGITAL CAMERA (D13)




FIG.9(b)

DISPLAY AREA CHANGE IN ACCORDANCE WITH
 DISPLAY MAGNIFICATION RATES CHANGE AT
 DIGITAL CAMERA (D11)




FIG.10(a)

50% DISPLAY AT DIGITAL CAMERA (D20)




FIG.10(b)

100% DISPLAY AT DIGITAL CAMERA (D30)




FIG.10(c)

WARNING SCREEN AT PC (D40)

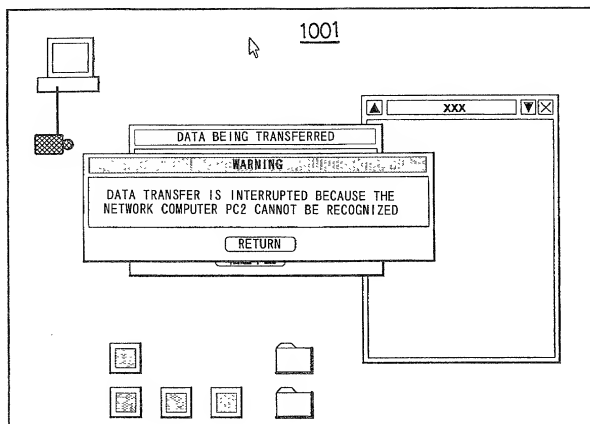


FIG.11(a)

WARNING SCREEN AT DIGITAL CAMERA (D40)




FIG.11(b)

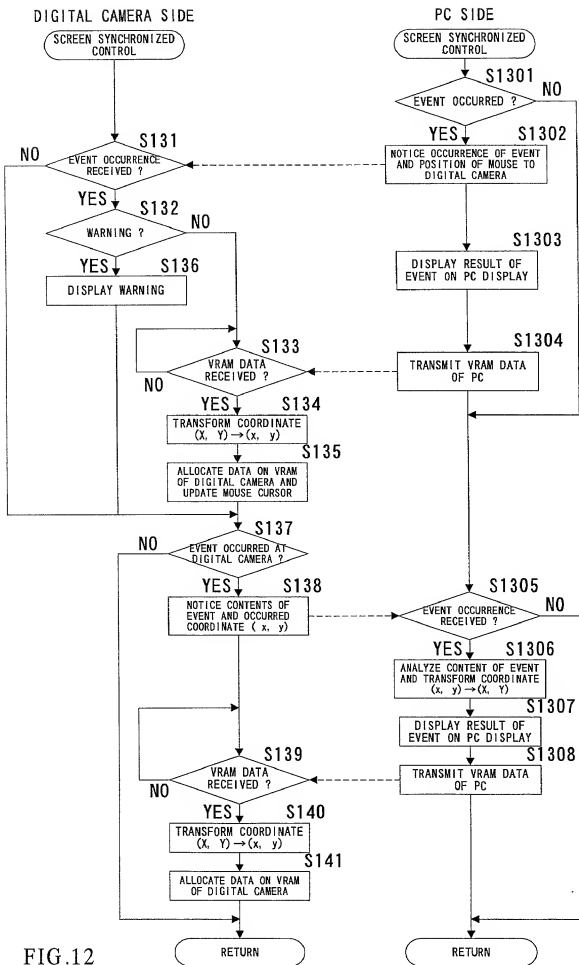


FIG.12

REGISTRATION OF ACTION TO FUNCTION KEY (D50)

REGISTRATION CHANGE OF F1 KEY	
<u>TRANSFER DATA</u>	<u>10</u>
SPECIFY FOLDER TO WHICH DATA ARE TRANSFERRED	
CHANGE SCREEN DISPLAY MAGNIFICATION	
TURN OFF POWER SOURCE OF PC	
DISPLAY IMAGE DATA IN PC	
EXECUTE APPLICATION IN PC	
TRANSFER IMAGE TO PC IMMEDIATELY AFTER PHOTOGRAPHING	

PRESS UP KEY/DOWN KEY TO SELECT CONTENT OF REGISTRATION AND PRESS SHUTTER BUTTON TO EFFECT	

FIG.13

DISPLAY SCREEN OF THE DIGITAL CAMERA FOR PRINTING
OUT THE PHOTOGRAPHED IMAGE DATA

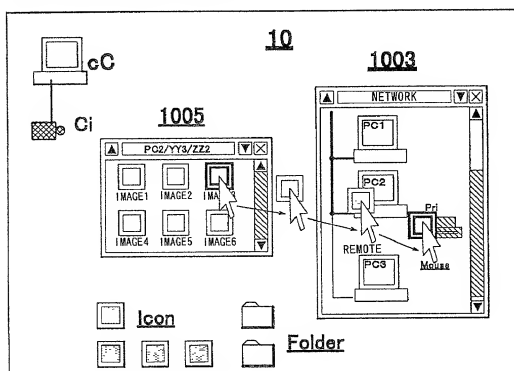


FIG.14

DISPLAY SCREEN OF THE DIGITAL CAMERA FOR EXECUTING THE APPLICATION SOFTWARE OF THE PERSONAL COMPUTER ON THE DIGITAL CAMERA

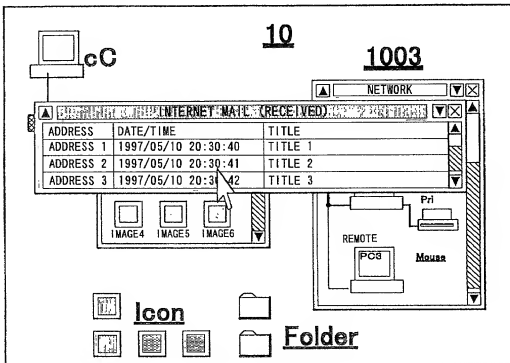


FIG.15

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR UTILITY PATENT APPLICATION**

Attorney's Docket No.

032567-009

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I BELIEVE I AM THE ORIGINAL, FIRST AND SOLE INVENTOR (if only one name is listed below) OR AN ORIGINAL, FIRST AND JOINT INVENTOR (if more than one name is listed below) OF THE SUBJECT MATTER WHICH IS CLAIMED AND FOR WHICH A PATENT IS SOUGHT ON THE INVENTION ENTITLED:

PHOTOGRAPHING APPARATUS AND NETWORK SYSTEM

the specification of which

(check one)



is attached hereto;



was filed on _____ as

Application No. _____

and was amended on _____;
(if applicable)

I HAVE REVIEWED AND UNDERSTAND THE CONTENTS OF THE ABOVE-IDENTIFIED SPECIFICATION, INCLUDING THE CLAIMS, AS AMENDED BY ANY AMENDMENT REFERRED TO ABOVE;

I ACKNOWLEDGE THE DUTY TO DISCLOSE TO THE OFFICE ALL INFORMATION KNOWN TO ME TO BE MATERIAL TO PATENTABILITY AS DEFINED IN TITLE 37, CODE OF FEDERAL REGULATIONS, Sec. 1.56 (as amended effective March 16, 1992);

I do not know and do not believe the said invention was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to said application; that said invention was not in public use or on sale in the United States of America more than one year prior to said application; that said invention has not been patented or made the subject of an inventor's certificate issued before the date of said application in any country foreign to the United States of America on any application filed by me or my legal representatives or assigns more than twelve months prior to said application;

I hereby claim foreign priority benefits under Title 35, United States Code Sec. 119 and/or Sec. 365 of any foreign application(s) for patent or inventor's certificate as indicated below and have also identified below any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application(s) on which priority is claimed:

COMBINED DECLARATION AND POWER OF ATTORNEY

Attorney's Docket No.

032567-009

COUNTRY/INTERNATIONAL	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED
Japan	10-108159	17 April, 1998	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>
			YES <input type="checkbox"/> NO <input type="checkbox"/>

I hereby appoint the following attorneys and agent(s) to prosecute said application and to transact all business in the Patent and Trademark Office connected therewith and to file, prosecute and to transact all business in connection with international applications directed to said invention:

William L. Mathis	17,337	Samuel C. Miller, III	27,360	Robert M. Schulman	31,196
Peter H. Smolka	15,913	Ralph L. Freeland, Jr.	16,110	William C. Rowland	30,888
Robert S. Swecker	19,885	Robert G. Mukai	28,531	T. Gene Dillahunty	25,423
Platon N. Mandros	22,124	George A. Hovanec, Jr.	28,223	Patrick C. Keane	32,858
Benton S. Duffett, Jr.	22,030	James A. LaBarre	28,532	Bruce J. Boggs, Jr.	32,344
Joseph R. Magnone	24,239	E. Joseph Gess	28,510	William H. Benz	25,952
Norman H. Stepano	22,716	R. Danny Hummington	27,903	Peter K. Skiff	31,917
Ronald L. Grudziecki	24,970	Eric H. Weisblatt	30,505	Richard J. McGrath	29,195
Frederick G. Michaud, Jr.	26,003	James W. Peterson	26,057	Matthew L. Schneider	32,814
Alan E. Kopecki	25,813	Teresa Stanek Rea	30,427	Michael G. Savage	32,596
Regis E. Sluter	26,999	Robert E. Krebs	25,885	Gerald F. Swiss	30,113

and: _____

Address all correspondence to:

Platon N. Mandros
BURNS, DOANE, SWECKER & MATHIS, L.L.P.
P.O. Box 1404
Alexandria, Virginia 22313-1404

Address all telephone calls to: _____ at (703) 836-6620.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR Masahito NIIKAWA		SIGNATURE <i>Masahito NiiKawa</i>	DATE Mar. 26, 1998
RESIDENCE Sakai-Shi, Osaka, Japan		CITIZENSHIP Japan	
POST OFFICE ADDRESS c/o MINOLTA CO., LTD., Osaka Kokusai Building, 3-13, 2-Chome, Azuchi-Machi, Chuo-Ku, Osaka-Shi, Osaka, 541-8556 Japan			
FULL NAME OF SECOND JOINT INVENTOR, IF ANY		SIGNATURE	DATE
RESIDENCE		CITIZENSHIP	
POST OFFICE ADDRESS			
FULL NAME OF THIRD JOINT INVENTOR, IF ANY		SIGNATURE	DATE
RESIDENCE		CITIZENSHIP	
POST OFFICE ADDRESS			